

SAW BENCHES WITH ELECTRIC MOTOR

SAW YOUR LOGS IN FULL EQUANIMITY AND WITH THE ELECTRIC COMFORT THANKS TO THE CIRCULAR SAW XYLOSCIE.




3 electric models for cutting diameters of 230 mm (on XYLOSCIE 600) or 280 mm (on XYLOSCIE 700).

Blade in carbide steel with alternate positioned teeth denture and with righth/left angling of the teeth so that few power is needed and the cut is clean:

- Ø blade 600 mm on XYLOSCIE 600,
- Ø blade 700 mm on XYLOSCIE 700.

CUTTING CAPABILITY

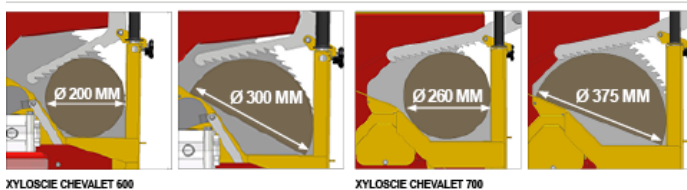

Safe and ergonomic stand sawhorse with holding clamp and handle.

Blade is fully covered by a casing with a mobile cover on the cutting area thanks to the rocking stand.

Controlled cutting length by a sliding rod (on XYLOSCIE 600) or by adjustable dead stop (on XYLOSCIE 700).

Machine stability with a centre of gravity lowered to the maximum and a strengthened machine-welded steel frame on XYLOSCIE 700.

Electric brake = blade stops in less than 10 seconds.

Discharge conveyor 4 or 5 m (in option on XYLOSCIE 700) with metal bars.

Circular saws complying with safety norm NF EN 1870-6+A1.


Registration number XYLOSCIE 600 E: 0062/5457/012/10/2010/0001

TECHNICAL CHARACTERISTICS


Models	XYLOSCIE 600 EM	XYLOSCIE 600 ET	XYLOSCIE 700 ET
--------	-----------------	-----------------	-----------------

Maximum diameter with motor	200 mm	200 mm	260 mm
Maximum diameter with motor	300 mm	300 mm	375 mm
Maximum log dimensions (L x B x H)	1.22 m x 0.78 m x 1.03 m	1.22 m x 0.78 m x 1.03 m	1.36 m x 0.97 m x 1.13 m
Blade diameter	600 mm	600 mm	700 mm
Type of teeth	Carbide	Carbide	Carbide
Weight	102 Kg	102 Kg	209 Kg
Log length control	By sliding rod	By sliding rod	By adjustable stop end
Drive	Electric Single-phased 3.1 KW / 4.1 HP	Electric Three-phased 4.2 KW / 5.6 HP	Electric Three-phased 5.5 KW / 7.5 HP
Thermal circuit breaker	Yes	Yes	Yes
Transportation	2 wheels Ø 200mm + handle	2 wheels Ø 200mm + handle	Transportation carriage (in option)

OPTIONS

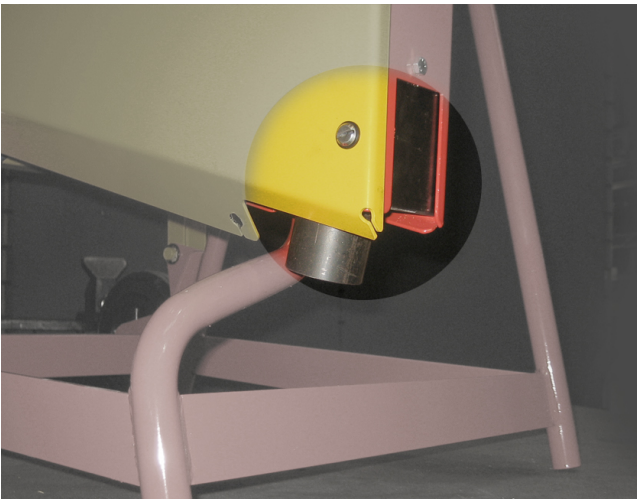


Sucking nozzle (for XYLOSCIE 600 EM & 600 ET)

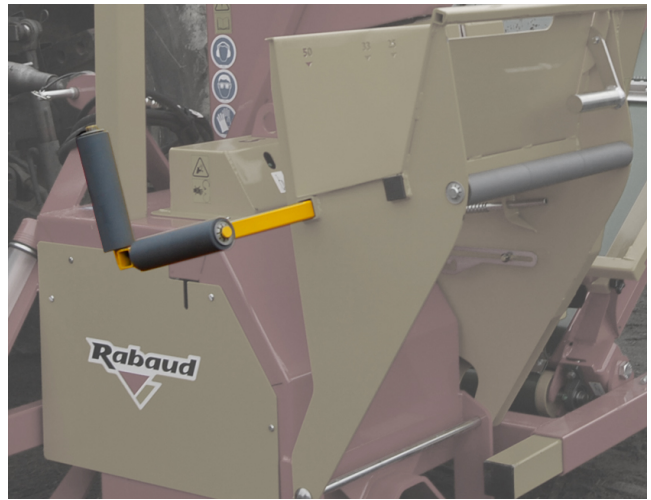

Log stand extension (for XYLOSCIE 700 ET)



Discharge conveyor 4 m or 5 m long (for XYLOSCIE 700 ET)

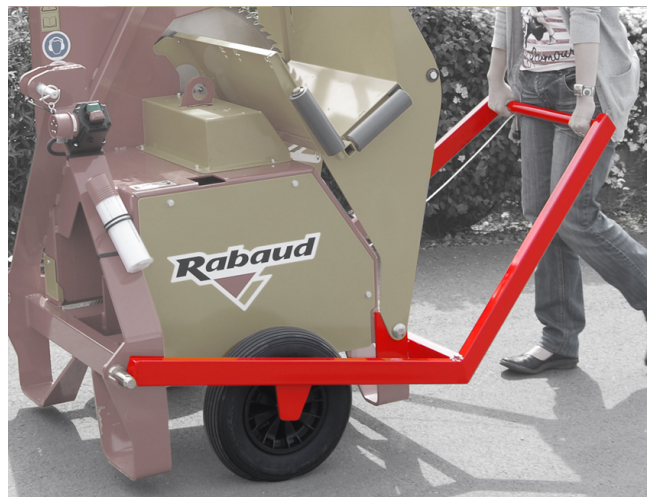

Transport trolley with 2 wheels (for XYLOSCIE 700 ET)













